





**FILTER
TECHNOLOGY**

cleaner fluids mean better business

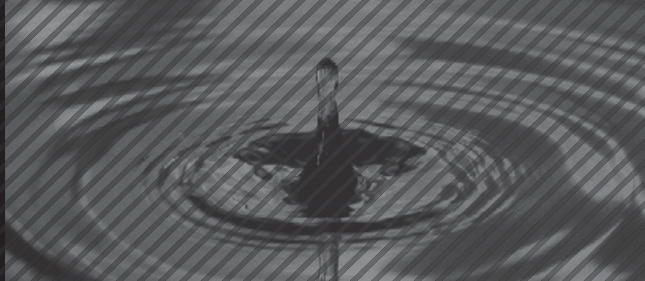

Filtration and Contamination Control Specialists

FM42444 Bulk Diesel Filtration Unit

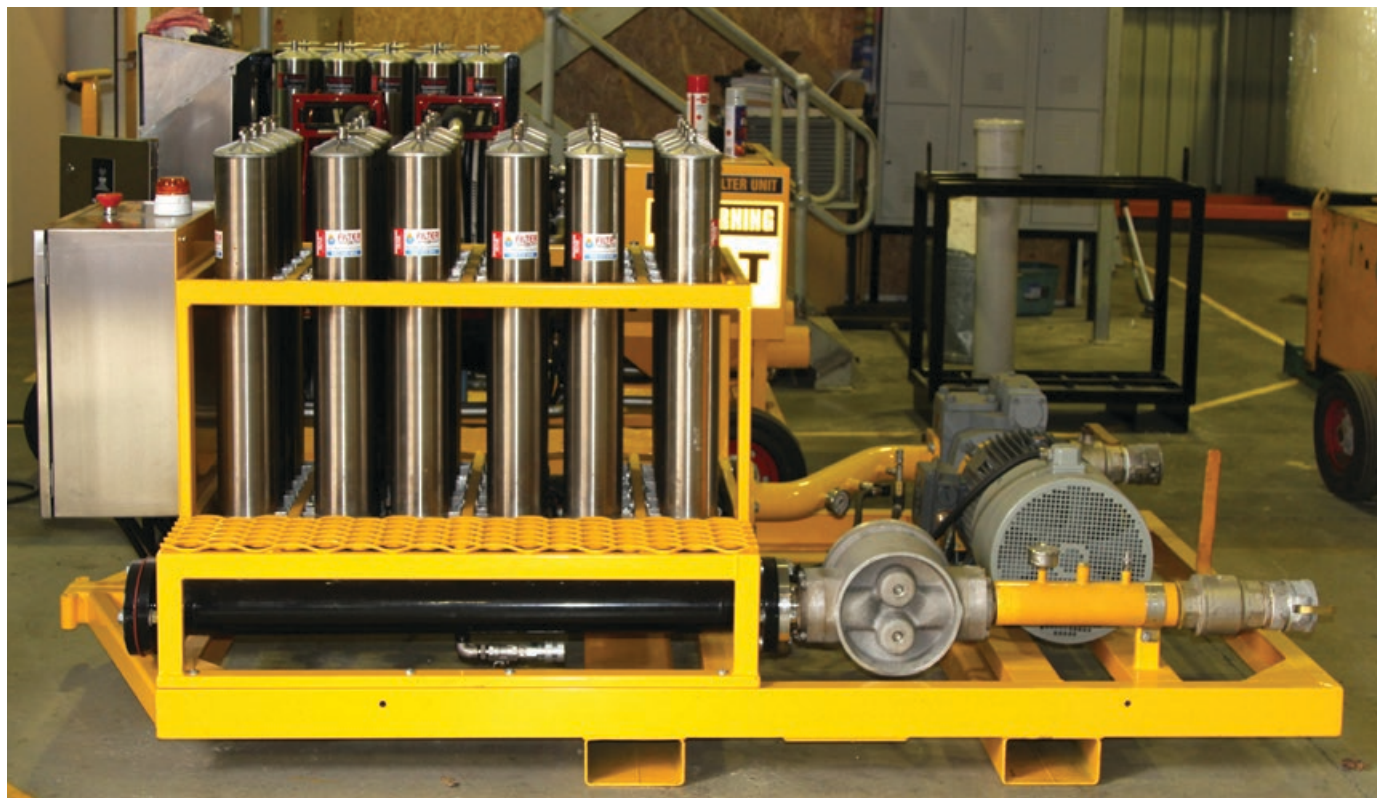

Features

- 415V 32A inlet
- Flow rate 900 litre/min
- Fitted with pressure relief valve
- Pressure gauge on the inlet and outlet
- Element change light
- Pressure differential switch
- Emergency stop button
- Live sample point on the inlet and outlet

Filters

- 24 x FM3204 industrial filter units.

Suitable for all:

- Diesel fuels
- Most solvents (not suitable for water)

Optional

- Can be trailer-mounted on request.
- RCI Pre-filter water separator
- Flow meter
- Isolation valves on the inlet and outlet
- 3" Camlock couplings

Function

This bulk diesel unit can be used to filter fuel contaminated with dust, rust, airborne contaminants, fungi and bacteria where the tanks have been treated with a biocide.

This unit can also be used as a remote filling station where fuel cleanliness cannot be guaranteed.

FM42444 Dimensions		
	Metric	US
Height	1350 mm	52"
Length	2800 mm	110"
Width	1500 mm	59"
Weight (wet)	1200 kg	2645 lb
Max Pressure	5 bar	72 psi
Recommended operating pressure	3 bar	43 psi



Filter Technology Australia

Office: 44 Bonville Avenue, Thornton NSW 2322 • Postal: PO Box 101 Beresfield NSW 2322

Tel: +61 2 4966 1833 • Fax: +61 2 4966 1933 • Toll Free Australia: 1800 626 899

Email: info@filtertechnology.com.au • Web: www.filtertechnology.com.au

